

RUN WITH RAM TRAILER



GENERAL CARGO GROUP

GENERAL CARGO SEMI TRAILER
WITH HIGH SIDEBORDS - 4 AXLE




TECHNICAL SPECIFICATION

GENERAL CARGO SEMI TRAILER WITH HIGH SIDEBOARDS - 4 AXLE

TECHNICAL SPECIFICATION FOR GENERAL CARGO SEMITRAILER

Fifth wheel height	—1420 mm
Total length	—16000 mm
Total Width	—2630 mm
Semi-trailer suitable for	—6x4 Truck Tractor
Chassis	—The Trailer has to lay on a special steel profile which connects the saddles. —On the special profile proper reinforcements have to be located for connection points of the running gears —Material is ST52 steel plate according to the dimensions of International Standards
Cargo Deck	—The flat bed has to be covered with chequered plate (3+1=4mm thickness), reinforced with crossbeam's chassis by U profiles.
Front Wall, Side Covers and River Cover	—Fixed type height of front wall be bolt and it has to be from 2,5 mm thickness channeled steel plate —Side Covers made from 6 PCS. —Open able type with TWO piece 1000 mm height and bolted. 700mm additional steel. —Rear Covers with open able operation.
Roof Grill type	—Portable steel profile assembled of the top of the side doors. With an option to be disassembled during loading of Containers.
Canvas	—Manuel type of canvas pleased on the top of the front wall.
King Pin	—3½" King – pin detachable from below made by SAE standards 8 bolt type.
Axles	—4 x 14000 kg carrying capacity TURKISH brand
Distance between Axles	—1380 mm
Brake and Suspension System	—MECHANICAL Suspension —FIRST AXLE Air suspension and lifting —Drum Brake System —Wabco Brake System —ABS Brake System
Landing Gears	—Double Speed, —24000 kg carrying capacity, —Jost brand two speed mechanical Landing Gears,
Rear Bumper	—Suitable 70/221 / AT-version of the rear bumper,
Wheel Chock	—Carriers with 1 unit wheel chock
Tires & Wheels	—16 +1 PCS 12 R 22,5 —Goodyear-Pirelli-Bridgestone
Mudguard	—2 pcs galvanized steel mudguards with plastic edges.
Spare Tire Carrier	—double tire piece tire carrier
Box	—1 unit Plastic Tool Box, —1 unit fire distinguisher plastic carrier's box.
Paint	—Material cleaned and grit (metal) material is blasting, —2 Floor Epoxy primers are made and the desired color, —In the final layer is painted with 2 coats acrylic paint
Electrical Equipment and Lighting	—There are amber-colored lights in the side by 3 units,— Park at the rear lamps, —License plate lamp, —Reflector triangles, —Electrical system; Flame proof electrical system 2 X 7-pin electrical socket.
Accessories	—Hub key, —Axles Bolt Nut key, —Tool box keys,
Shipping type	—2 units will be one set

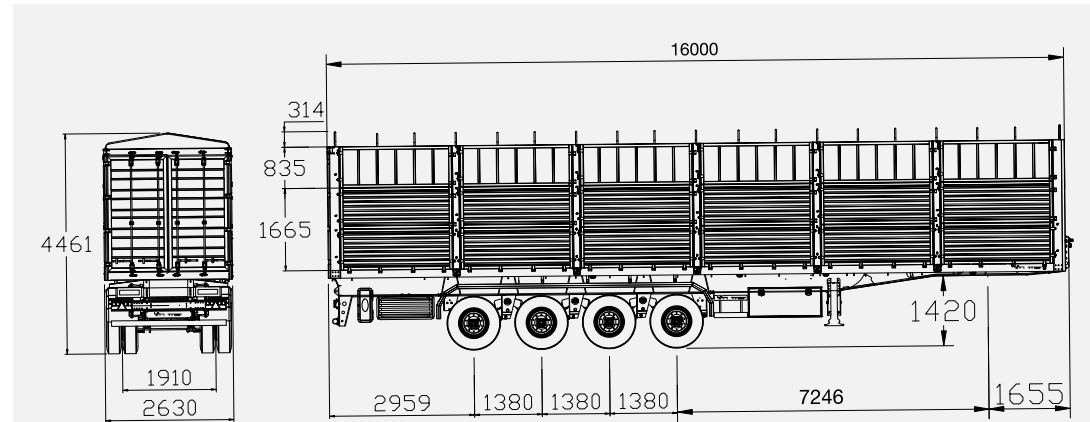

MECHANICAL SUSPENSION 4 X 14 T AXLE
TIRES 12 R 22,5 - 16+1 PCS



RAM İTHALAT İHRACAT İNŞAAT NAKLİYAT SANAYİ VE TİCARET LİMİTED ŞİRKETİ

Konya Organize Sanayi Bölgesi Gönülveren Sok No : 20/5 Selçuklu / KONYA

www.ramtreyler.com

info@ramtreyler.com

ramtreyler

+90 552 642 12 84

+255 752 914 241

Tanzania Service and Spare Parts Sales Point



RAM TREYLER , reserves the right of making changes in the technical specifications and components without making any prior notice. Some components seen on the photographs and specifications seen here may not be standard features of the vehicles. There may have been some changes after publication of this document. No right can be claimed on a sign or numbers used by seller or buyer to define a product on ordering. Differences in colors are due to printing techniques.



TSEK

